

# Modular High-Precision Pressure Indicator Model CPG 8000

WIKA Data Sheet CT 25.05

## Applications

- National institutes and institutions
- Research and development laboratories
- Industry (laboratory, workshop and production)
- Calibration service companies

## Special features

- Up to 4 sensors can be integrated
- Pressure ranges: from 0 ... 100 mbar to 0 ... 2500 bar
- Total uncertainty of measurement: 0.025 % ... 0.008 % (certified)
- Over pressure safety (up to 400 bar)
- Easy retrofitting



High-Precision Pressure Indicator CPG 8000

## Description

### Areas of application

The CPG 8000 is a modular pressure system incorporating up to 4 high-precision pressure sensors and a barometric reference as an option.

Due to its certified uncertainty of up to 0.008 % the system is especially suitable as a factory / working standard for the calibration or testing of any pressure measuring instrument. Its modular construction enables it to be adapted to suit all customer's requirements.

### Functionality

The high-resolution colour graphics display, on which up to 4 windows with many extras can be viewed simultaneously, is a new feature for an instrument of this class. They can be used to display the pressure signal in different pressure units or to activate various functions.

8 programmable relay outputs, a data logger and various functions, such as Min, Max, Hold, Zero, Average, Pressure

rate or Zero point adjustment ensure that the precision pressure systems can be used for many different applications.

### Software


WIKA calibration and documentation software EasyCal is to make the calibrations of any type of pressure measuring instrument easy and enable calibration certificates to be produced. Furthermore the customer can also create his own test programs with the help of the software LabVIEW®.

### Complete testing and calibration systems


An IEEE-488.2 and a RS-232 interface exist for communication with other instruments, and therefore the instrument can be integrated into an existing compound system, or, on request, customised mobile or stationary test systems can be manufactured.

## Dimensions in mm


### Desk top model

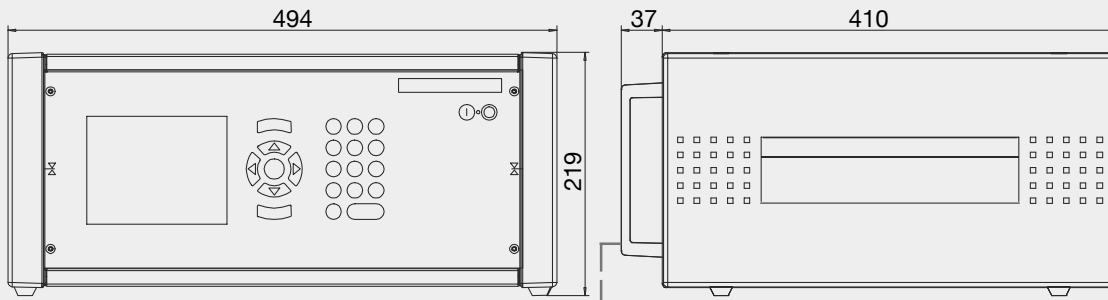


### 19" plug-in case

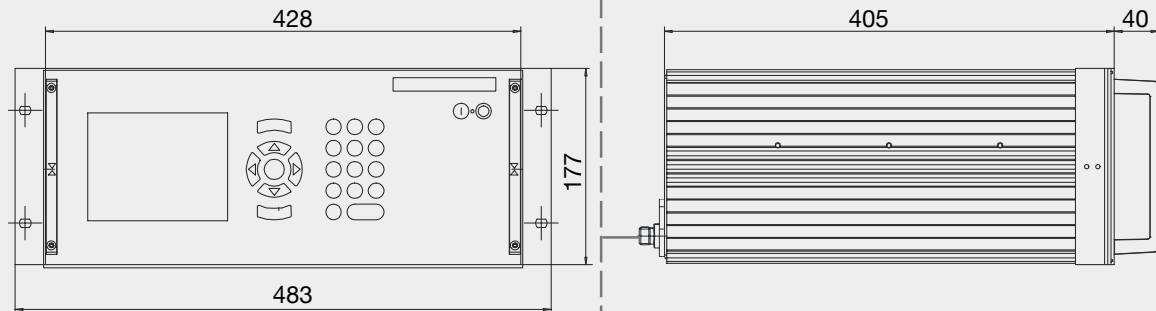

### Rear view

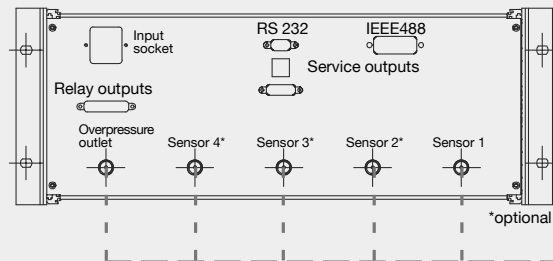

### Optional adapters

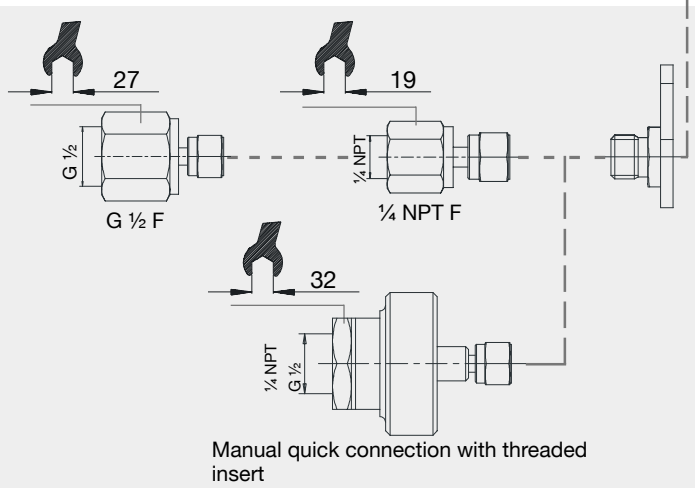

**Pressure ports:** (depending on pressure range)  
 up to 400 bar: 6 mm SWAGELOK® tube fitting  
 over 400 bar: 1/4" SNOTRIK® tube fitting

## Specifications

## CPG 8000

|  |             |  |
|--|-------------|--|
| Number of integratable sensors (selectable)    | pcs.        | 1 ... 4  |
| Pressure range <sup>1)</sup>                   | bar         | 0 ... 0.1 up to 0 ... 2500 (sensor related)                                  |
| Total uncertainty of measurement <sup>1)</sup> |             | 0.025 % FS up to 0.008 % IS <sup>2)</sup> (sensor related)                   |
| Pressure ports                                 |             |  |
| - up to 400 bar (standard version)             |             | 6 mm SWAGELOK® tube fitting  |
| - over 400 bar (high pressure version)         |             | ¼" SNOTRIK® tube fitting   |
| Pressure ports adapter                         |             | on request   |
| Tube material                                  |             | stainless steel 1.4571 & 1.4401 (all connections without seals)              |
| Overpressure protection (up to 400 bar)        |             | safety valves, scaled to 120 % of FS   |
| Instrument version                             |             | desk top / 19" plug -in case   |
| Screen   |             | TFT-Colour graphics display (320 x 240 Pixel)                                |
| Screen division                                | windows     | 1, 2 or 4  |
| Indication of measured values                  | digits      | up to 7  |
| Measuring rate                                 | values/sec. | up to 8 (sensor related)   |
| Keyboard                                       |             | Membrane keyboard  |
| Evaluation unit                                |             | Motorola 50 MHz Power PC-Board   |
| Operating system                               |             | Windows CE   |
| Digital interface                              |             | RS-232 and IEEE-488.2  |
| Relay outputs                                  |             | 8 programmable change-over contacts  |
| Power supply                                   |             | 100-240 VAC, 50/60 Hz, < 55 VA   |
| Permissible                                    |             |  |
| Media  |             | sensor related; for any noncorrosive liquid resp. clean, dry air or nitrogen |
| Operating temperature                          | °C          | 15 ... 35  |
| Storage temperature                            | °C          | 0 ... 70   |
| Air humidity                                   | %           | 35 ... 85 relative humidity without moisture condensation                    |
| Ingress protection                             |             | IP31 (front panel IP41)  |
| Weight   | Kg          | 10 ... 17 (dependent on sensors used)  |
| Dimensions                                     |             | see technical drawings   |
| CE-mark  |             | conformity certificate   |
| Calibration <sup>3)</sup>                      |             | Incl. calibration report 3.1 according to DIN EN 10 204                      |

1) For pressure ranges available and accuracies please see current price list.

2) IntelliScale offers a total uncertainty of measurement of 0.008 % of Reading in the upper 2/3 of the span and 0.008 % of 1/3 FS in the lower one-third of the span.

3) Calibrated in a horizontal mounting position.


## Wiring details

The input socket and the digital interfaces (see Rear view on Page 2) should/must only be connected with specific connection cables approved for this purpose.

### Relay outputs (8 potential free change-over contacts)


Condition of wiring scheme as shown: inactive

Output capacity of relays: max. 1 A / 30 VDC

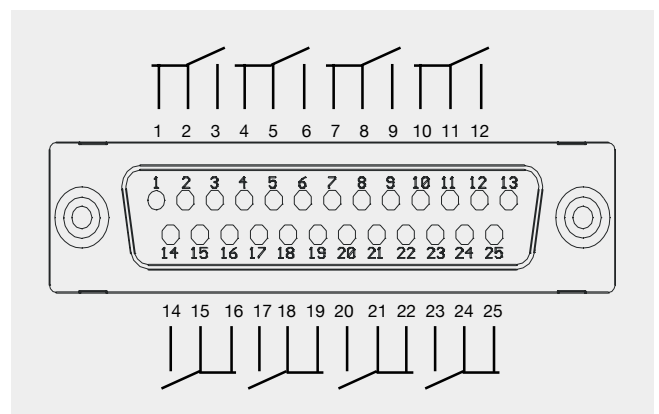


## Examples of display (up to 4 windows can be viewed simultaneously)

### Single window example

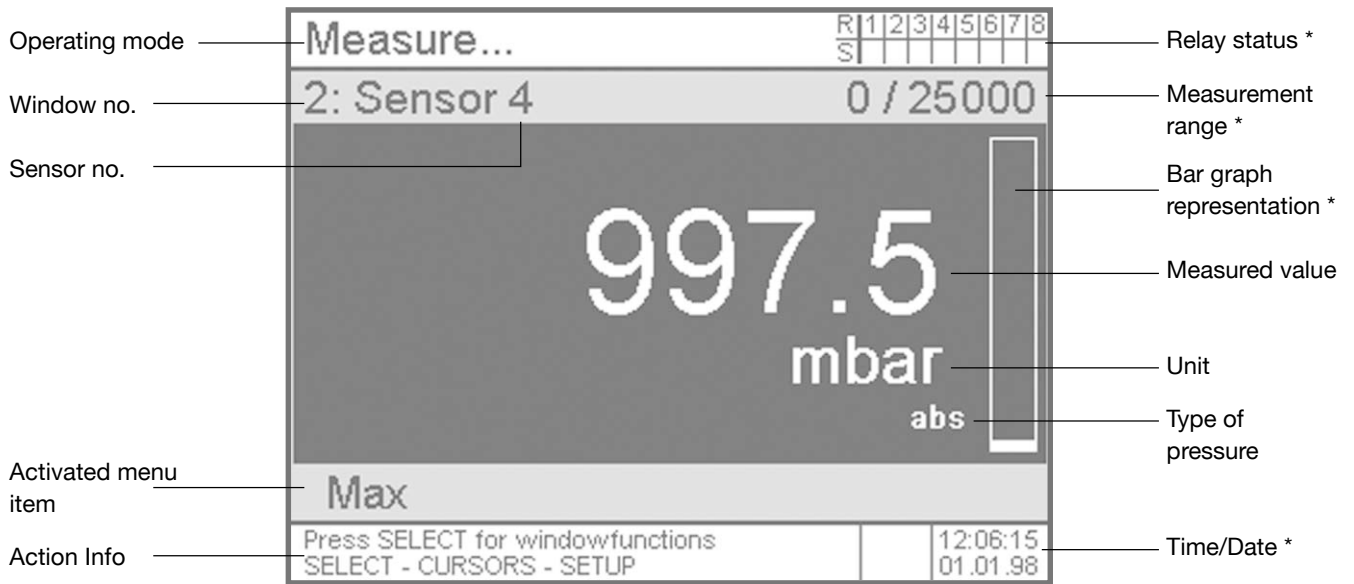

\* can be masked out

### 4 Window example

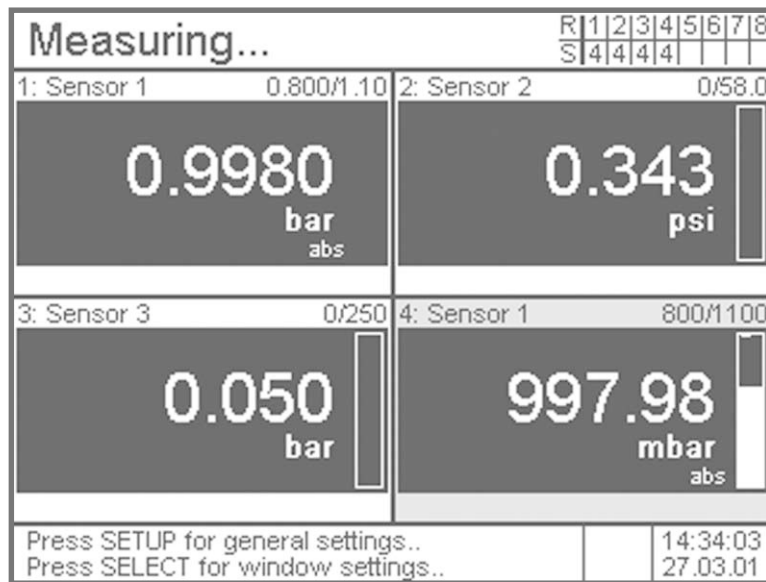

#### The windows can be used:

- To display more than one sensor signal
- To display one signal in different pressure units
- To display the difference between 2 sensor signals
- To activate one or two functions

# Automatic calibration through CPG 8000 and PC Calibration Software EasyCal

The WIKA calibration software has been developed for the calibration (testing device monitoring) of mechanical and electronic pressure gauges according to ISO 9000.

The screenshot displays the 'Calibration assistant - Step 4' window. It includes a 'Test cycle' section with a list of 13 measuring points from 0.0000 to 6.0000 bar. The 'Calibration method' is set to 'Read at the calibration object' with a temperature of 21.0 °C. A 'Calibration Sheet' table is shown below, detailing set values, calibration objects, and standards. The bottom part of the interface features control buttons for 'Start', 'Pause', 'Control', 'Measure', 'Approx. value', and 'Zero', along with a 'Manual value adjustment' section.

Below the software interface is a 'Calibration Certificate' (Abnahmeprüfzeugnis) for a WIKA CPG 8000. The certificate includes the following data:

| Set value | Calibration object | Pressure standard | Absolute | Relative |
|-----------|--------------------|-------------------|----------|----------|
| up/down   | Up                 | Down              | Up       | Down     |
| bar       | bar                | bar               | bar      | %        |
| 0.0000    | 0.0000             | -0.0060           | 0.0060   | 0.1000   |
| 0.5000    | 0.5000             | 0.4910            | 0.0090   | 0.1500   |
| 1.0000    | 1.0000             | 1.0000            | 0.0000   | 0.0000   |
| 1.5000    | 1.5000             | 1.4700            | 0.0300   | 0.5000   |
| 2.0000    |                    | 1.9700            |          |          |
| 2.5000    |                    |                   |          |          |
| 3.0000    |                    |                   |          |          |
| 3.5000    |                    |                   |          |          |
| 4.0000    |                    |                   |          |          |
| 4.5000    |                    |                   |          |          |
| 5.0000    |                    |                   |          |          |
| 5.5000    |                    |                   |          |          |
| 6.0000    |                    |                   |          |          |

The certificate also includes a table for 'Eigenschaften' (Properties) and a signature section.

## The software offers:

- Calibration assistant that guides through a calibration
- User-friendly menu
- Automatic generation of calibration steps according to EN 837-1
- Certificates 3.1 in accordance with EN 10 204
- Customised test protocols possible (Access Report-Designer)
- Archiving of calibration data as well as instrument administration via Access database
- Language: English/German

**DEMO-Version available (free of charge)**



**Interface communication: via RS-232 or IEEE-488.2**

### Scope of supply

- High-Precision Pressure Indicator CPG 8000
- Mains cable 1.5 m with mains plug
- Operating instructions in English
- Calibration report 3.1.B according to DIN EN 10 204

### Options

- DKD certificated accuracy
- 19" plug-in case
- Up to 4 sensors can be integrated
- Barometric reference
- Complete testing and calibration systems

### Accessories

- Rugged transport box (aluminium)
- Pressure adapter and manual quick connection adapter
- Interface cable
- Calibration software EasyCal
- Instruments for pressure generation
- Service tools



### Application example

## Products and Services within our Testing and Calibration Technology Program

- DKD calibration services for pressure
- Repair of calibration units of all makes
- Portable pressure measuring devices for testing and calibration tasks
- Precision pressure measuring units and pressure controllers
- Primary standards for pressure
- Testing technology system solutions
- DKD calibration services for temperature
- Temperature dry well calibrators
- Calibration baths and furnaces
- Temperature measuring instruments for testing and calibrating tasks
- Precision thermometers
- Primary standards for temperature
- Consulting and training

Specifications and dimensions given in this leaflet represent the state of engineering at the time of printing. Modifications may take place and materials specified may be replaced by others without prior notice.



**WIKAL Alexander Wiegand GmbH & Co. KG**  
Alexander-Wiegand-Straße 30  
63911 Klingenberg / Germany  
Phone (+49) 93 72/132-9986  
Fax (+49) 93 72/132-217  
E-Mail [testequip@wika.de](mailto:testequip@wika.de)  
[www.wika.de](http://www.wika.de)