



Shut-off valve

Shut-off valve

Design	Pressure range	Order No.
Shut-off valve	up to 1000 bar	2011620

Threaded adapters for knurled nuts

The threaded adapters with female threads are intended for adaption to the knurled nuts M28 x 1.5 of all gauge adapters and changeable columns, purifiers, dirt traps as well as rinsing and filling glasses. The thread variants listed cover the range of commonly used connection threads of pressure gauges. As a standard the adapters are made of brass. Please specify the material stainless steel for pressures of 1,000 bar or more.

Design	Thread	Order No.
Threaded adapter *)	G1/8	2010887
Threaded adapter *)	G1/4	2010879
Threaded adapter	G3/8	2010526
Threaded adapter	G1/2	2010348
Threaded adapter	G5/8	2011361
Threaded adapter *)	1/8 NPT	2011069
Threaded adapter *)	1/4 NPT	2010895
Threaded adapter *)	3/8 NPT	2011107
Threaded adapter	1/2 NPT	2010798
Threaded adapter *)	M10 x 1	2011093
Threaded adapter *)	M12 x 1,5	2011379
Threaded adapter *)	M14 x 1,5	2011425
Threaded adapter	M20 x 1,5	2010631
Threaded adapter	M20 x 1.5LH	2011794



Threaded adapter with female thread for knurled nut M28 x 1.5

*) For these threaded adapters the sealing insert specified below is required in order to fit them into knurled nuts M28 x 1.5.

Sealing insert

This sealing insert with O-ring 6 x 1.5 is required to fit shorter threaded adapters into knurled nuts M28 x 1.5 (marked with * in the above list).

Design	Material	Order No.
Sealing insert	Stainless steel	2011514

Set of adapters in a tool case

The set of adapters includes 5 different threaded adapters with female thread (G1/4, G3/8, 1/4 NPT and M20 x 1.5) and a sealing insert to be fitted into the knurled nut M28 x 1.5 as well as a spanner, flats 32 and flats 14. Just like the threaded adapters and the sealing inserts (see page 12) the spanner may also be obtained separately.

Design	Material	Order No.
Set of adapters in a tool case	Brass	2036941
Spanner, flats 32 and flats 14	Stainless steel	2015854



Set of adapters in a tool case



Spanner, flats 32 and flats 14

Blind plug

Blind plug with thread G1/2 B and flats 27

Design	Pressure range	Material	Order No.
Blind plug	up to 1600 bar	1.4571	1438964




Blind plug

Set of O-rings / sealing rings

The set of O-rings consists of the following O-rings: 25 pieces 6 x 1.5, 35 pieces 8 x 2, 10 pieces 10 x 2, 10 pieces 12 x 2, 10 pieces 14 x 2, 3 pieces 24 x 3, 3 pieces 34 x 2, 2 pieces 45 x 3, 2 pieces 50 x 3, 2 pieces 5 x 2.5 and 4 sealing inserts for low pressure fine adjustment valve (order No. 2048388).

The set of sealing rings includes 40 standard sealing rings.

Design	Order No.
Set of O-rings	7140207
Set of sealing rings	7140274

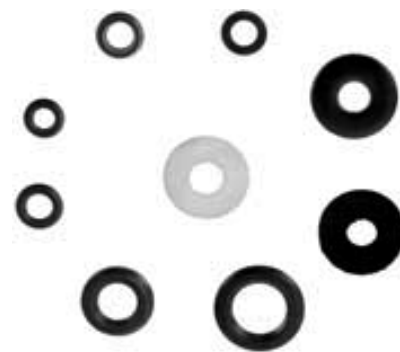

Set of sealing rings